

CyberKey, Replaceable Battery, Control Key

Part number: CK-IR7C

☒ Pro ☒ Enterprise


The control key is needed only for installing and removing CyberLock interchangeable core cylinders including P/N CL-LF01 and CL-SF03. The control key must be programmed to open the cylinders it will be installing or removing.

The CK-IR7C is not compatible with other CyberLock cylinders.



Specifications

Physical	Fiberglass reinforced nylon, stainless steel tip
Operating Temperatures	32° to 122° F, 0° to 50° C
Dimensions	2.97" H x 1.65" W x 0.85" D (75.5 mm x 41.9 mm x 21.6 mm)
Weight	1.5 oz (43.1 g)
Power	3 V lithium CR2 battery, field replaceable
Memory	Internal memory supports an audit trail of up to 3900 events
CyberAudit-Web Link	Via any compatible CyberLock Communicator
Communicator Link	Via the key tip and/or through the infrared port
Visual Indicators	One indicator light (battery level and key activation)
Audio Indicator	An embedded speaker (battery level, access, and communication)

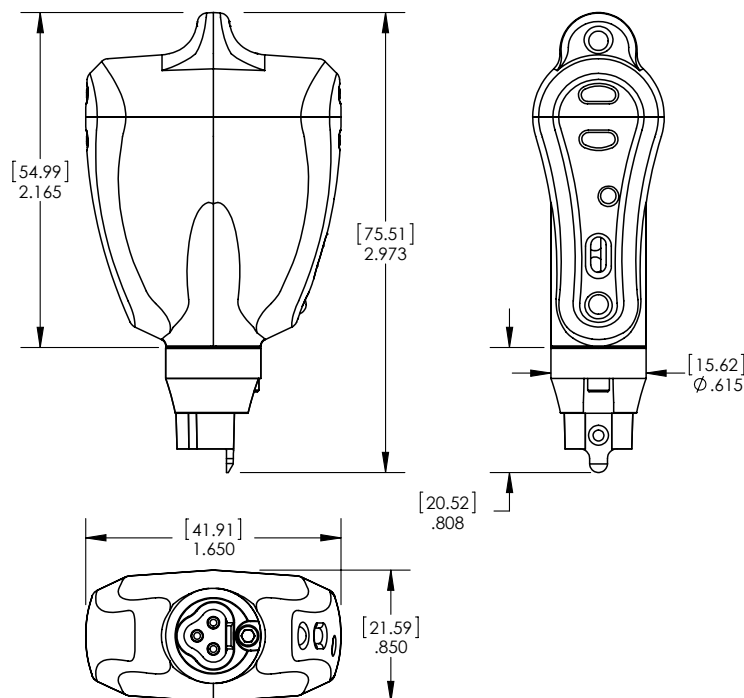

Notes:
Dimensions in inches (mm)
Drawing not to scale